


# Low intensity LED obstruction light type B

## LGP - 900/AC




Compatibility with specifications: ICAO type B

ELECTRICAL	
<b>Power supply</b>	100-250 AC
<b>Light beam</b>	32 cd typ B
<b>Emission level</b>	Min 32 cd @ +/- 10 stopni
<b>Ingress Protection</b>	IP 67
<b>No radioelectric disturbance</b>	
<b>Vitality</b>	Minimum 100 000 hours of continuous work
<b>Reliability</b>	30 independent LED sections (for 5 items) preventing total failure
<b>Additional internal twilight switch</b>	
MECHANICAL	
<b>Connector</b>	
<b>Material</b>	Aluminium cast, powder painting, high-durable polycarbonate, red colour, hot-dip galvanized steel
<b>Diameter of mounting mast</b>	Max 70,0 mm , optional to 100,00 mm with reduction

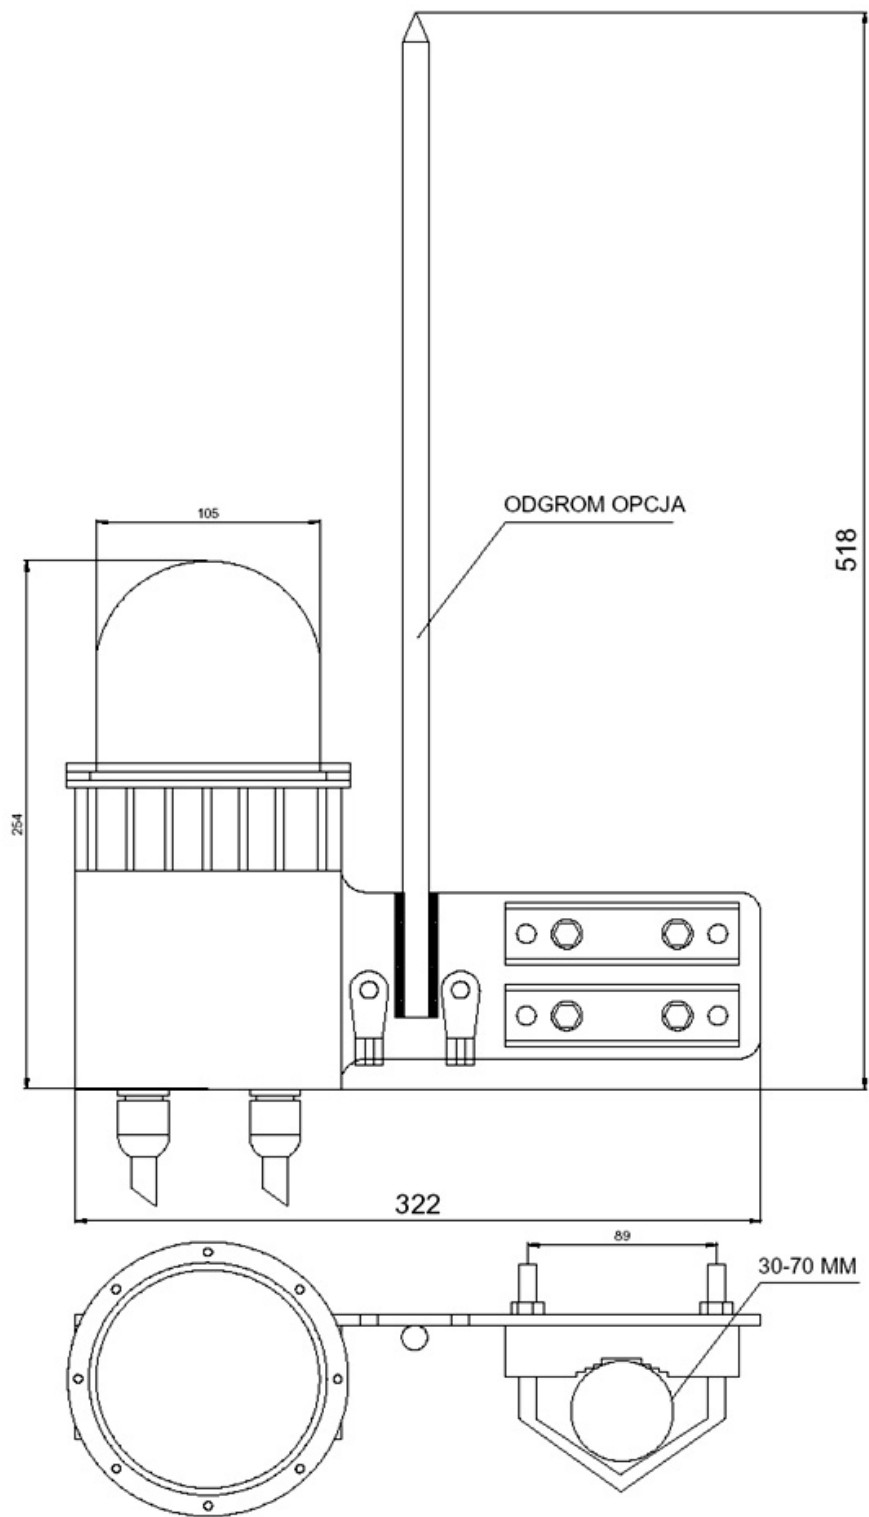

External dimensions of the LGP 900/AC

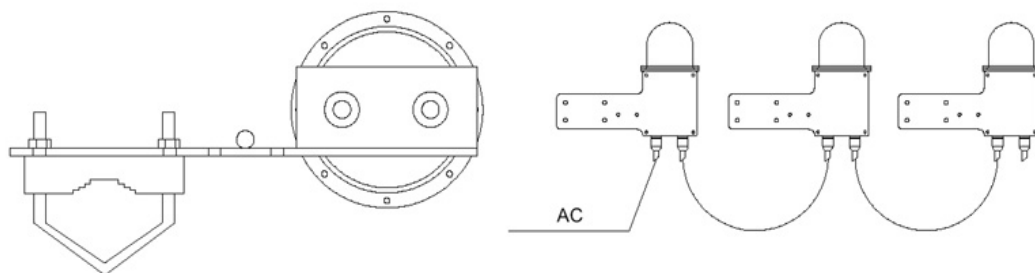

Serial connection of the LGP 900/AC



**P.U.P. Net-Com**

41-902 Bytom, ul. Piekarska 102/7

tel./fax (32) 282-68-21, 0601-22-08-97

[www.net-com.bytom.pl](http://www.net-com.bytom.pl) e-mail : [biuro@net-com.com.pl](mailto:biuro@net-com.com.pl)