

# Low intensity LED obstruction light


## LGP - 900



Compatibility with specifications: ICAO type B

<b>ELECTRICAL</b>	
<b>Power supply</b>	12-14 / 24- 30 V
<b>Light beam</b>	32 cd
<b>Emission level</b>	Min 32 cd @ +/- 10 degrees
<b>Cooperation with dedicated power supply unit PGP900</b>	Configuration of 1,2,3,4 lights in redundance system
<b>No radioelectric disturbance</b>	
<b>Vitality</b>	Minimum 100 000 hours of continuous work
<b>Reliability</b>	30 independent LED sections (for 5 items) preventing total failure
<b>MECHANICAL</b>	
<b>Connector</b>	
<b>Material</b>	Aluminium cast, powder painting, high-durable polycarbonate, red colour
<b>Diameter of mounting mast</b>	Max 50,0 mm , optional to 100,00 mm with reduction

External dimensions of LGP 900

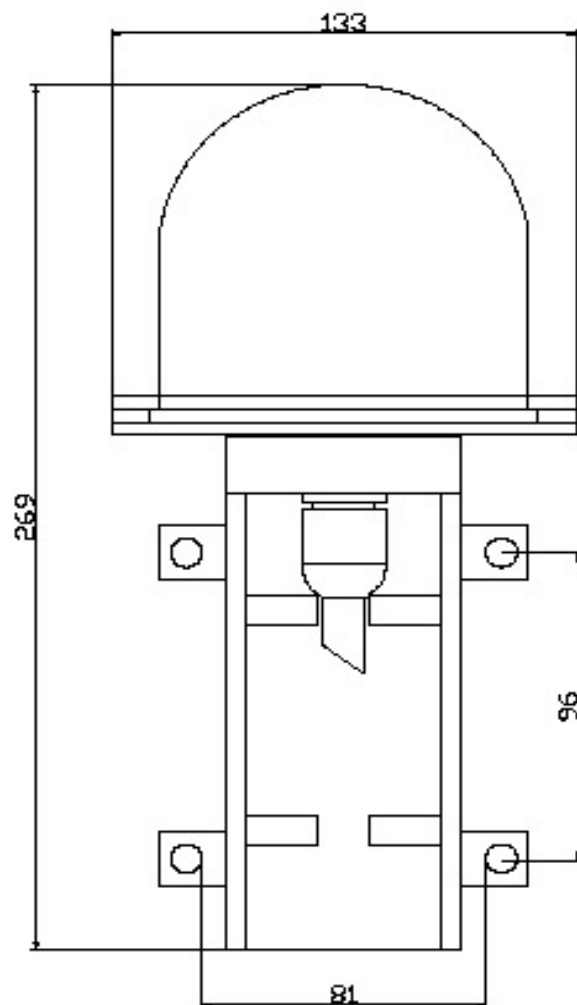

---

**NET-COM**  
**ul. Piekarska 102/7**  
**41-902 Bytom**  
**tel/fax: 032 28268212**  
**GSM: 601220897**  
**[WWW.NET-COM.BYTOM.PL](http://WWW.NET-COM.BYTOM.PL)**  
**[biuro@net-com.bytom.pl](mailto:biuro@net-com.bytom.pl)**

---